


### Step 1 (For Single Hitches)


For Models HSX & HLX

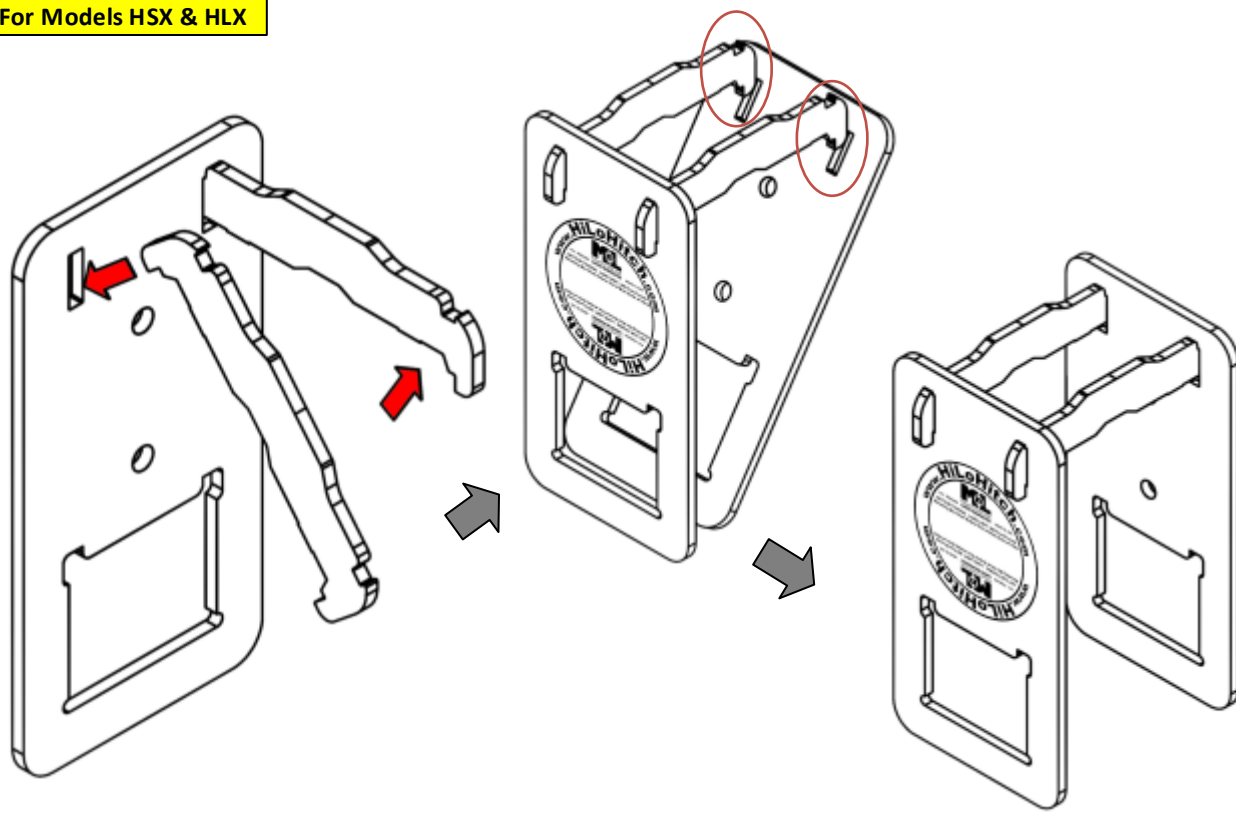

Installation Instructions Continue on Other Side

Visit [www.mount-n-lock.com/installs](http://www.mount-n-lock.com/installs) for full-size instructions.

© Copyright 2018 BetterBilt Solutions LLC. All Rights Reserved. Patents Pending.

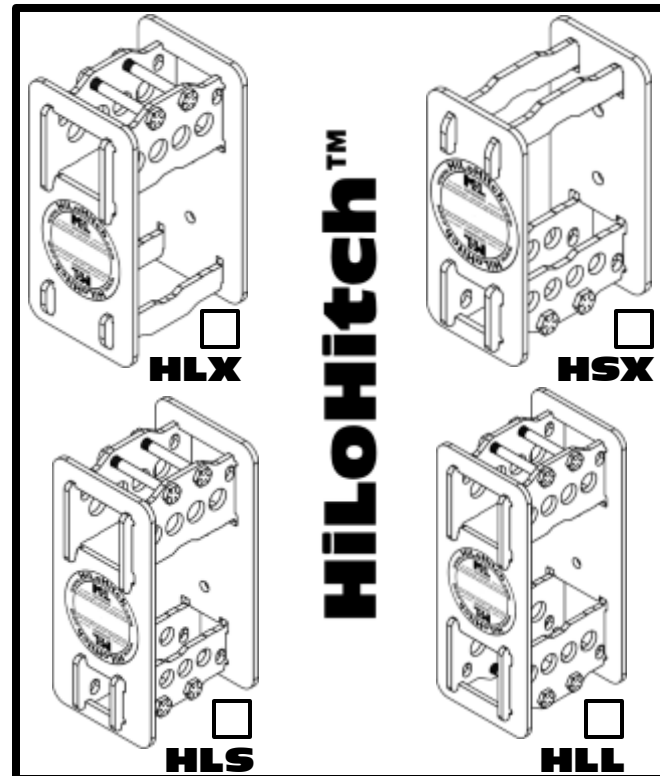

## PLEASE READ & UNDERSTAND THIS ENTIRE GUIDE BEFORE STARTING INSTALLATION

To Avoid Damage, Cargo Accessory's Mounting Bar Must Extend Through Both Face Plates When Hitch Is in Use

Turn Bolts – Not Nuts – When Using Draw Plate

Alternate Bolts Every ¼ Turn When Using Draw Plate

Draw Bolts Get Reused As Guide Bolts - Do Not Discard

Do Not Travel Unless Guide Bolts Are Installed in Hitch

Mount HiLoHitch™ Opening(s) Above Or Below Bumper


Only Use the Fasteners That Are Supplied with Product

Wedge-Type Anti-Rattle Devices Cause Bumper Damage



HiLoHitch™ Maximum Cargo Load is 300 Pound-Feet

### Step 1 (For Dual Hitches)


**For Models HLL & HLS**

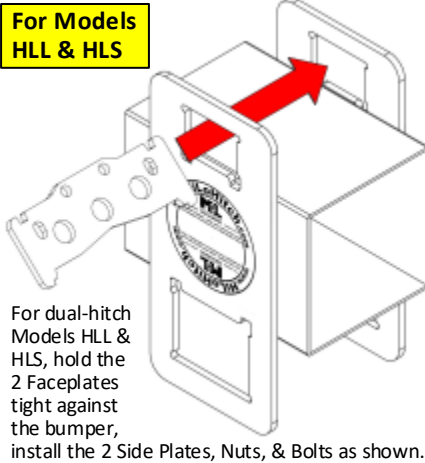

**NOTE: For Model HLS, install Short Side Plates First.**

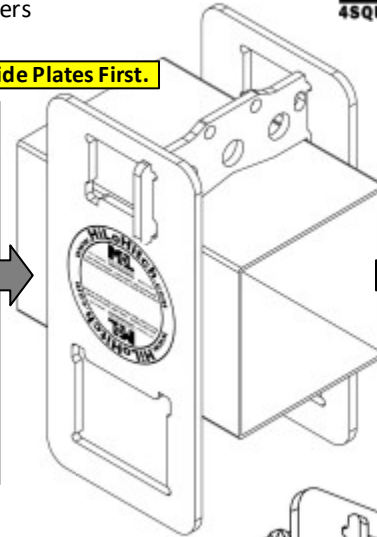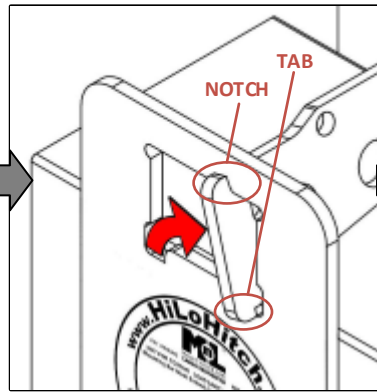




Install 2<sup>nd</sup> Side Plate, Bolts, and Lock Nuts. Do not over-tighten; the Bolts should spin freely!

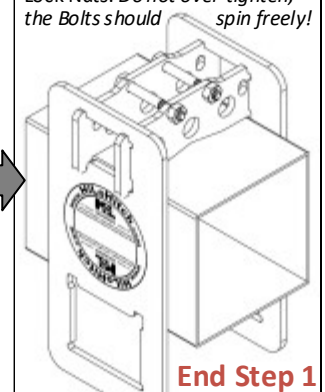

### Step 2

**All Models**

Insert first Side Plate into opposite end of Faceplates as shown in Step 1 (HLL/HLS). Stand the Side Plate up as far vertically as possible and then use Bolts, Spacer Nuts, Washers, Draw Plate, and Draw Nuts as shown to draw Side Plate fully vertical. Repeat on second Side Plate and then install Lock Nuts and Bolts as shown below.

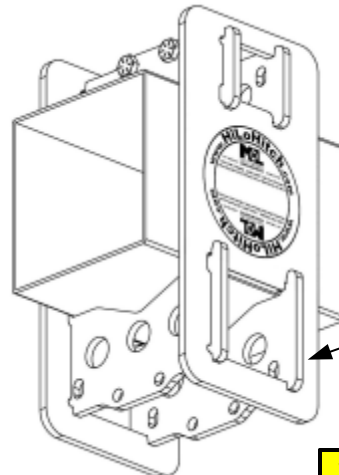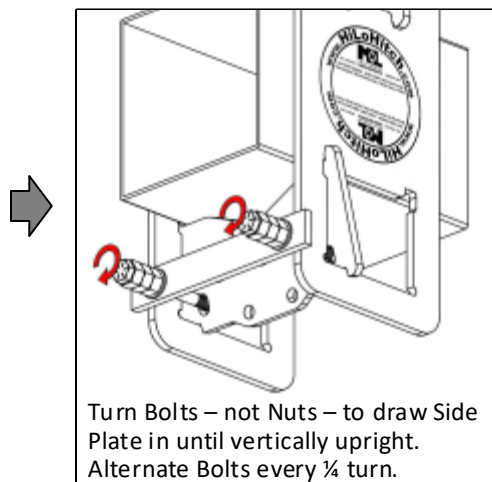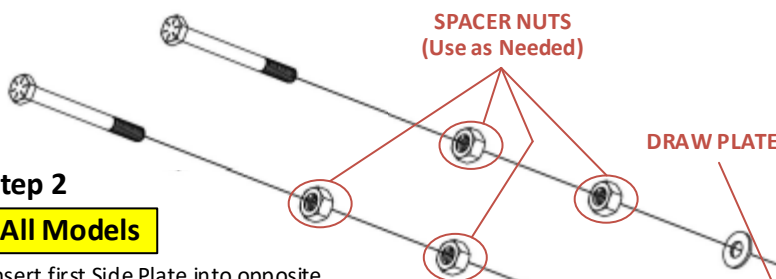

**DRAW NUTS (Not Locknuts)**



Install 2<sup>nd</sup> Side Plate using Draw Plate and Bolts following the same steps as for the 1<sup>st</sup> Side Plate.

### Final Steps

**SECURE IT:** Install self-tapping bolts in back plate as shown at left. Tighten bolts until hitch is snug to bumper.

**GUIDE BOLTS:** Install Guide Bolts and Lock Nuts as shown at right (reuse the Draw Bolts).

**LEAVE LOOSE:** Guide Bolts should spin freely but can be tightened to clamp your accessory's mounting bar to hitch.

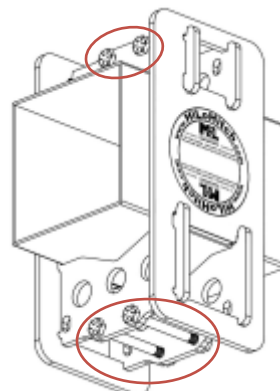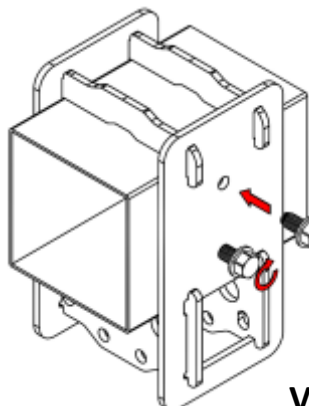

### WARNING

To Avoid Damage, Cargo Accessory's Mounting Bar Must Extend Through Both Face Plates When Hitch Is in Use

